


# SecurEdge 400 Snap Coping - Max

ANSI/SPRI ES-1 CERTIFIED: 32" - .040" Aluminum = 100 psf, 24GA Steel = 75 psf

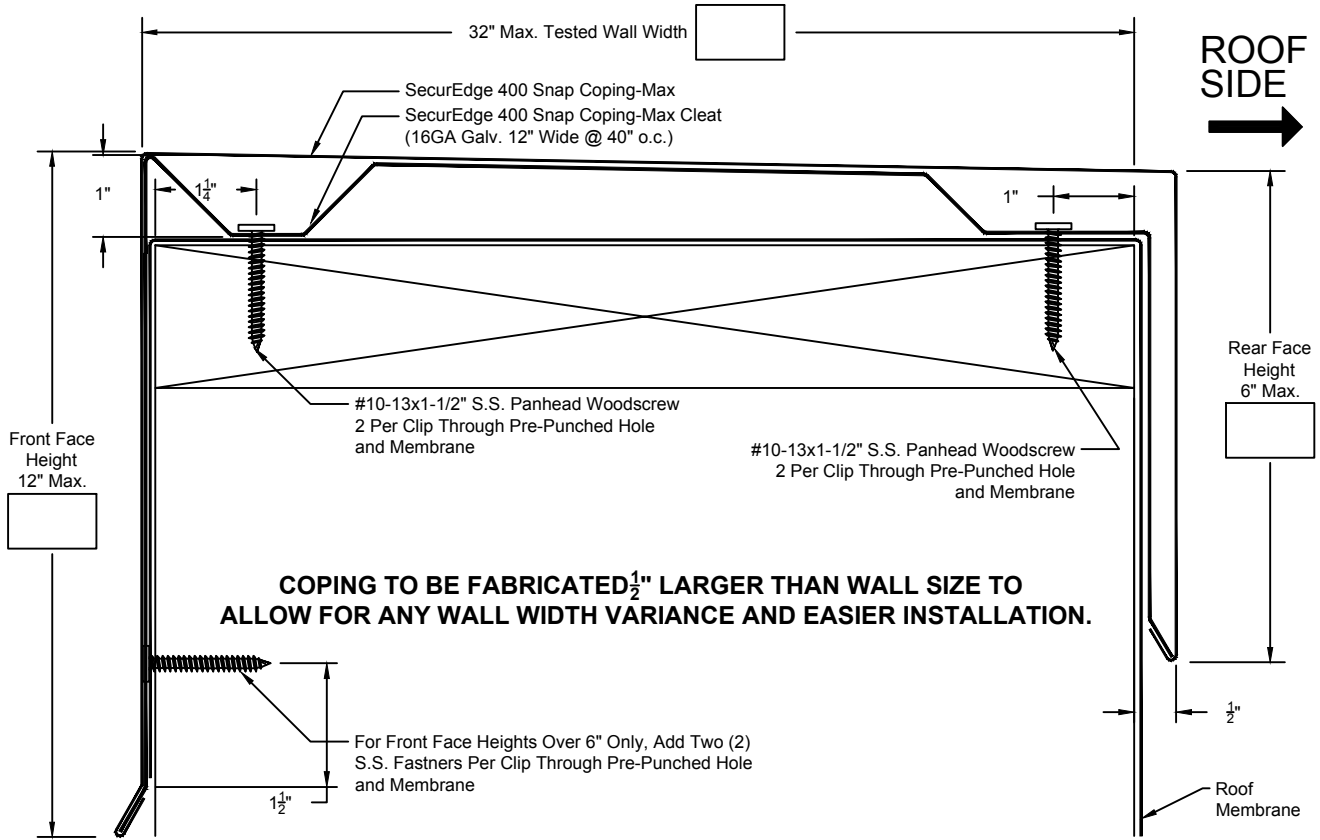

- Segmented Cleat and Fasteners provided.
- Concealed Splice Plates provided.

## PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Carlisle's printed instructions.

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

## QUANTITIES:

Lineal Feet (10'-0" Lengths): \_\_\_\_\_

Outside Miters\*: \_\_\_\_\_  Optional Welded (Surcharge Applies)

Inside Miters\*: \_\_\_\_\_  Optional Welded (Surcharge Applies)

Right End Caps\*: \_\_\_\_\_  Optional Welded (Surcharge Applies)

Left End Caps\*: \_\_\_\_\_  Optional Welded (Surcharge Applies)

\* Standard riveted

PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ROOFING CONTRACTOR: \_\_\_\_\_

REPRESENTATIVE: \_\_\_\_\_



P: (800) 479-6832 , F: (717) 245-7053 , www.carlisesyntec.com

## MATERIAL:

24GA  .040" AL

Other: \_\_\_\_\_

Finish: \_\_\_\_\_

Color: \_\_\_\_\_

Effective Date: 6-1-18

Drawn By: J.S.

Approved By: B.P.