



6 FASTENERS PER 4'x8' BOARD

FM 1-90 (FIELD)

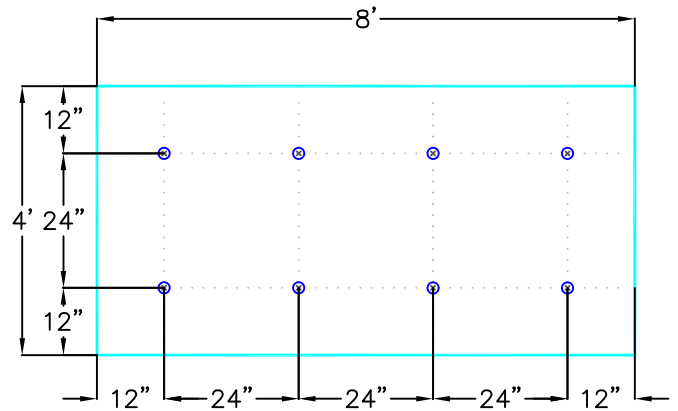


8 FASTENERS PER 4'x8' BOARD

FM 1-105 (FIELD) GRADE 'C' STEEL DECKS
FM 1-120 (FIELD) GRADE 'E' STEEL DECKS

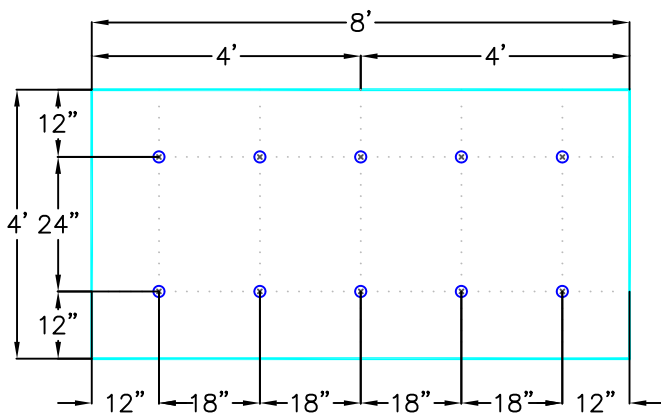


10 FASTENERS PER 4'x8' BOARD

FM 1-90 (PERIMETER) ENHANCEMENT PATTERN

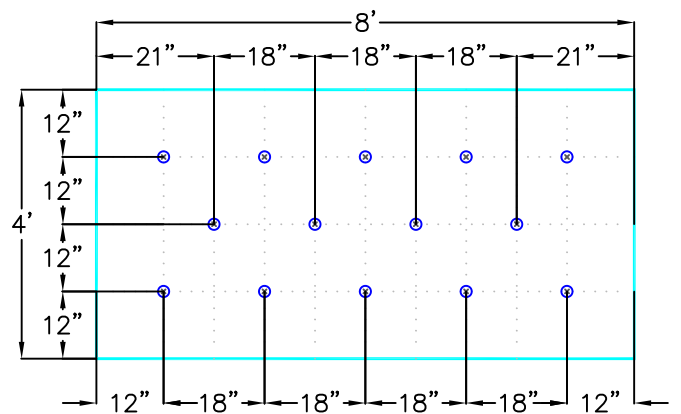


14 FASTENERS PER 4'x8' BOARD

FM 1-105 (PERIMETER) ENHANCEMENT GRADE 'C' STEEL DECKS
FM 1-120 (PERIMETER) ENHANCEMENT GRADE 'E' STEEL DECKS

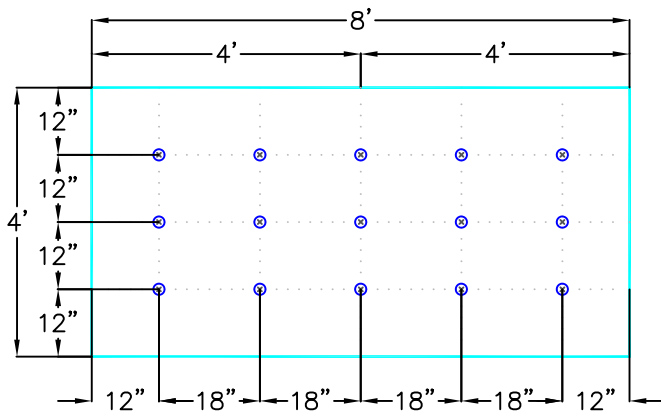

15 FASTENERS PER 4'x8' BOARD

FM 1-90 (CORNER) ENHANCEMENT PATTERN

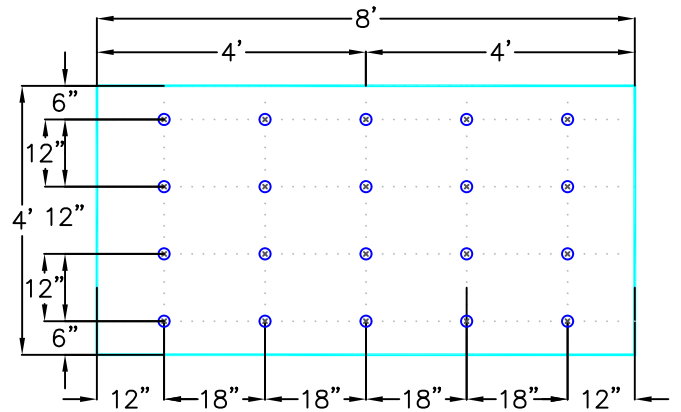

20 FASTENERS PER 4'x8' BOARD

FM 1-105 (CORNER) ENHANCEMENT GRADE 'C' STEEL DECKS
FM 1-120 (CORNER) ENHANCEMENT GRADE 'E' STEEL DECK

<p> → THERMOPLASTIC MEMBRANE → APPROVED SUBSTRATE → SEE NOTE(S) </p>	<p>RhinoBond ATTACHMENT METHOD – FM FASTENING PATTERNS</p> <p>For additional information, refer to Specifications</p>	<p>DETAIL NO. RB-3</p> <p>RhinoBond</p>
---	---	--