

The combination of installation ease and impeccable results makes the CM 150SL roof system a standout choice. The 1½" Snap Lock profile and the CM 150SL Clip create a continuous interlocking system that installs quickly, reducing labor costs. The concealed fastener and clip application allows thermal expansion and contraction movement, helping to keep the beautiful finish straight and true.




Available Widths:

16"*

*Carlisle Metal Products' design pressures, wind uplifts, and test reports are for specific deck attachments, material gauges, clip spacing, and panel widths.

A complete specification and listing is available online at

www.carlislemetalproducts.com

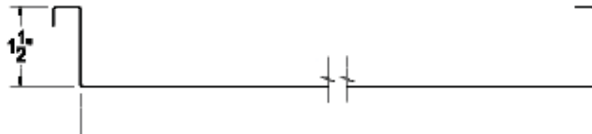

Available Substrates:

- Galvalume® – .024"
- Drexlume® – .024"



Finishes and Product Warranties:

This material is available in a variety of coatings and colors by AkzoNobel. Refer to the Carlisle Metal Products color card for standard colors and paint specifications.



Galvalume Substrate:
High-performance painted metal roofing product, carefully tension-leveled for superior flatness.

35 YEAR WARRANTY

35-Year Non-Prorated PVDF Paint Warranty

Drexlume Substrate:
Mill finished Galvalume with a two-sided, clear acrylic finish.

25 YEAR WARRANTY

25-Year Non-Prorated Drexlume Warranty (Acrylic-Coated Galvalume)

Production Options:

Factory-made or field-rolled to exact lengths.

Optional: striation, beads, pencil ribs.

Installation:

This material can be installed over plywood decking and Carlisle Metal Products WIP 300HT rubberized asphalt underlayment.



WIP 300_{HT}
WATER & ICE PROTECTION HIGH-TEMPERATURE

Slope:

Minimum Slope 3:12



Minimum Roof Pitch:
3:12 – low roof pitch

Testing:

In accordance with:



- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third-Party Verified
- Florida Building Code Approved
- ASTM E1646 Water Infiltration