## SecurEdge 400<sup>™</sup> Coping

\*22GA Cleat testing is available for projects requiring higher pressures.


ANSI/SPRI ES-1 CERTIFIED: 16" - .040" Aluminum = 240 psf, 24GA Steel = 180 psf

24" - .040" Aluminum = 110 psf, 24GA Steel = 130 psf

"Quick Ship" Program Availability			
Cleat Part Number	Front Face Height	Nailers Covered	
CO-25F-C	2-1/2"	1	
CO-4F-C	4"	2	
☐ CO-6F-C	6"	3	
"Ouick Ship" Flashing Color			

Regal White	☐ Bone White	Sandstone
☐ Sierra Tan	Forest Green	Colonial Red
☐ Medium Bronz	e Dark Bronze	Mansard Bro

- ☐ Slate Grav ☐ Charcoal Gray ☐ Matte Black ☐ Slate Blue ☐ Bright Silver
  - "Quick Ship" Program Notes
- 2 to 5 day lead time available on standard part orders less than 1000'.
- 24 Gauge or .040" Aluminum only.
- Miters require additional lead time.
- Continuous Cleat and Fasteners provided.
- Concealed Splice Plates provided.

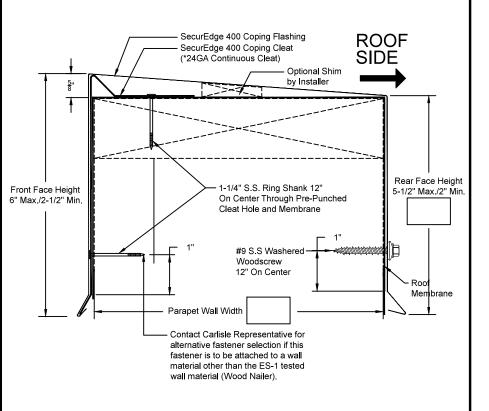

## PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Carlisle's printed instructions. Signed Print Approval and Carlisle P.O. required prior to fabrication.

Approved By:		
Date:	Phone #:	

## **QUANTITIES:**

Lineal Feet (10'-0" Lengths	s):
Outside Miters*:	_ Optional Welded (Surcharge Applies)
Inside Miters*:	Optional Welded (Surcharge Applies)
Right End Caps*:	Optional Welded (Surcharge Applies)
Left End Caps*:	_ Optional Welded (Surcharge Applies)
* Standard riveted	

PROJECT:		
ARCHITECT:		

ROOFING CONTRACTOR:

REPRESENTATIVE:



P: (800) 479-6832, F: (717) 245-7053, www.carlislesyntec.com

$\mathbf{\Lambda}$	1	A	ſΕ	R	A	Τ.
IV		/ 🐧 ]			I / <b>N</b>	1 /

☐ 24GA	☐ .040" AL
Other	

Finish:

Color:

Effective Date: 8-1-15

Drawn By: J.S.

Approved By: K.L.