


SecurEdge 400™ Spring-Tite Gravel Stop

ANSI/SPRI ES-1 CERTIFIED: .040" Aluminum = 210 psf, 24GA Steel = 200 psf

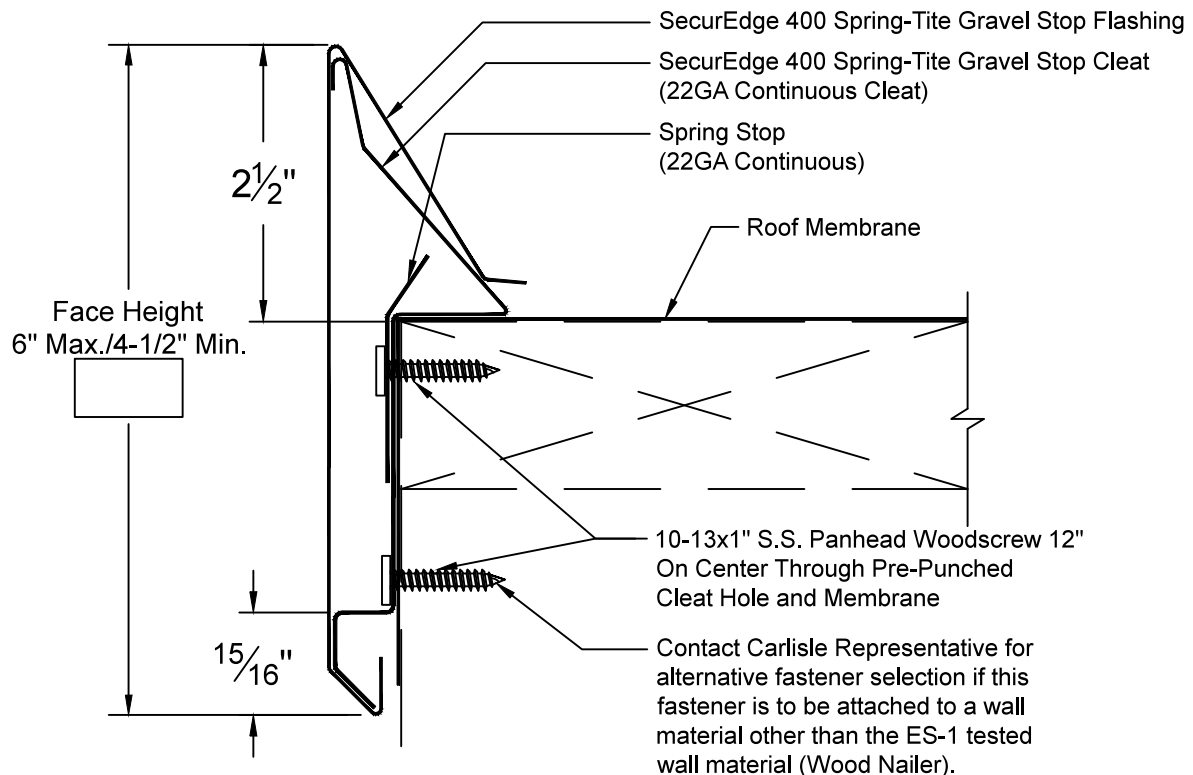

- Continuous Cleat and fasteners provided.
- Concealed Splice Plates provided.

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Carlisle's printed instructions. Signed Print Approval and Carlisle P.O. required prior to fabrication.

Approved By: _____

Date: _____ Phone #: _____

QUANTITIES:

Lineal Feet (10'-0" Lengths): _____

Outside Miters*: _____ ☐ Optional Welded (Surcharge Applies)

Inside Miters*: _____ ☐ Optional Welded (Surcharge Applies)

Right End Caps*: _____ ☐ Optional Welded (Surcharge Applies)

Left End Caps*: _____ ☐ Optional Welded (Surcharge Applies)

* Standard riveted

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE: _____



MATERIAL:

☐ 24GA ☐ .040" AL

☐ Other: _____

Finish: _____

Color: _____

Effective Date: 8-1-15

Drawn By: J.S.

Approved By: K.L.

P: (800) 479-6832 , F: (717) 245-7053 , www.carlisesyntec.com